


BriskHeat® SREH Enclosure / Control Panel Heaters

Product Highlights

- ✓ Prevents condensation or freezing of electronics located within enclosures and control panels
- ✓ Easy-to-install mounting plate
- ✓ Air sensing thermostat
- ✓  73/23/EEC. See page A-1 for more information.

Moisture
and Chemical
Resistant

Temperatures up to




450°F (232°C)



Specifications:

- Heating element is laminated between two layers of 15 mil fiberglass reinforced silicone rubber
- Silicone rubber density of 16.8 oz/yd² (570 grams/m²) per layer
- Overall thickness (blanket and bracket) of 1/4" (6mm)
- Exposure temperature range: 32°F to 450°F (0°C to 232°C)
- Aluminum mounting plate comes with two 7/16" (11mm) holes for mounting
- Mount either vertically or horizontally
- Optimal control achieved by mounting vertically
- Operating voltage of 120VAC
- 48" (1219mm) TEFLON® extruded leads
- Dielectric strength of over 2000 volts
- Moisture, chemical, and radiation resistant

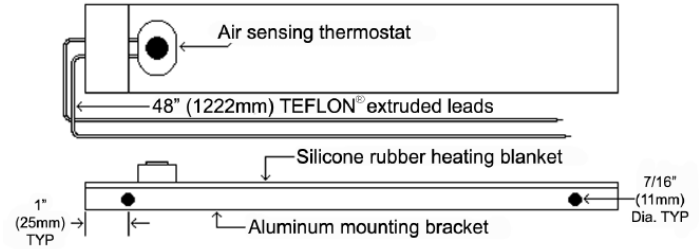

Ordering Information:

Width in (mm)	Length in (mm)	Total Watts	Thermostat		Part number 120VAC
			Opens	Closes	
2 (51)	6 (152)	60	without	thermostat	SREH600
2 (51)	6 (152)	60	60°F (15°C)	40°F (4°C)	SREH640
2 (51)	6 (152)	60	140°F (60°C)	110°F (43°C)	SREH6110
2 (51)	6 (152)	60	180°F (82°C)	150°F (65°C)	SREH6150
2 (51)	12 (305)	120	without	thermostat	SREH1200
2 (51)	12 (305)	120	60°F (15°C)	40°F (4°C)	SREH1240
2 (51)	12 (305)	120	140°F (60°C)	110°F (43°C)	SREH12110
2 (51)	12 (305)	120	180°F (82°C)	150°F (65°C)	SREH12150

TEFLON® is a registered Trademark of DuPont used under license.